

YŞ½±´¿½ö Î »-·² Üí èè

Ü«®±° »óß°®½¿óÓ·¼¼´ » Ü¿-æ ÝÑÓÓÛÏ Ý×ßÔ

CYCOLAC G365 is a high heat, medium impact injection moulding ABS grade based upon new manufacturing technology. It is recommended for parts in the automotive and appliances segments where the heat resistance of CYCOLAC G365 is desired.

İ ÇĐ×ÝßÔ ĐÏ ÑĐÛÏ Ì ×ÛÍ g	İ ÇĐ×ÝßÔ ÊßÔËÛ	ËÒ×Ì	Ï Ì ßÒÛßÏ Û
<b>ÓÛÝØßÔ×ÝßÔ</b>			
Taber Abrasion, CS-17, 1 kg	100	mg/1000cy	SABIC Method
Tensile Stress, yield, 5 mm/min	45	MPa	ISO 527
Tensile Stress, break, 5 mm/min	35	MPa	ISO 527
Tensile Stress, yield, 50 mm/min	50	MPa	ISO 527
Tensile Stress, break, 50 mm/min	40	MPa	ISO 527
Tensile Strain, yield, 5 mm/min	3	%	ISO 527
Tensile Strain, break, 5 mm/min	10	%	ISO 527
Tensile Strain, yield, 50 mm/min	3	%	ISO 527
Tensile Strain, break, 50 mm/min	10	%	ISO 527
Tensile Modulus, 1 mm/min	2500	MPa	ISO 527
Flexural Stress, yield, 2 mm/min	75	MPa	ISO 178
Flexural Modulus, 2 mm/min	2500	MPa	ISO 178
Hardness, H358/30	93	MPa	ISO 2039-1
Hardness, Rockwell R	115	-	ISO 2039-2
<b>×ÓßßÝÏ</b>			
Izod Impact, notched 80*10*4 +23°C	11	kJ/m²	ISO 180/1A
Izod Impact, notched 80*10*4 -30°C	6	kJ/m²	ISO 180/1A
Charpy 23°C, V-notch Edgew 80*10*4 sp=62mm	11	kJ/m²	ISO 179/1eA
Charpy -30°C, V-notch Edgew 80*10*4 sp=62mm	6	kJ/m²	ISO 179/1eA
<b>Ï ØÛÏ ÓßÔ</b>			
Thermal Conductivity	0.2	W/m·°C	ISO 8302
CTE, 23°C to 60°C, flow	8.E-05	1/°C	ISO 11359-2
CTE, 23°C to 60°C, xflow	8.E-05	1/°C	ISO 11359-2

1) Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 230C/50% relative humidity. All properties, except the melt volume rate are measured on injection moulded samples. All samples are prepared according to ISO 294.

2) Only typical data for material selection purpose. Not to be used for part or tool design.  
 3) This rating is not intended to reflect hazards presented this or any other material under actual fire conditions.  
 4) Own measurement according to UL.  
 5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Dongguan Yi-Ming Plastic Chemical Co., Ltd.

如需要更多物性资料请查阅 [www.kedisujiao.com](http://www.kedisujiao.com)

备注：以上原料物性数据由厂家发布，我公司仅提供参考！数据如有变动，请联系原料生产厂家获知。我公司不承担任何法律责任！

YŞ½±´¿½ö Î »-·² Üí èè

Ü«®±°»óß°®½¿óÓ·¼¼» Ü¿-æ ÝŃÓÓŪÎ Ý×ßÔ

İ ÇĐ×ÝßÔ ĐÎ ŃĐŪÎ İ ×ŪÍ g	İ ÇĐ×ÝßÔ ÈßÖÈÜ	ÈÖ×İ	İ İ ßÖŪßÎ Ü
<b>İ ØŪÎ ÓßÔ</b>			
Ball Pressure Test, 75°C +/- 2°C	PASSES	-	IEC 60695-10-2
Ball Pressure Test, approximate maximum	100	°C	IEC 60695-10-2
Vicat Softening Temp, Rate B/50	108	°C	ISO 306
Vicat Softening Temp, Rate B/120	110	°C	ISO 306
HDT/Be, 0.45MPa Edgew 120*10*4 sp=100mm	102	°C	ISO 75/Be
HDT/Ae, 1.8 MPa Edgew 120*10*4 sp=100mm	85	°C	ISO 75/Ae
Relative Temp Index, Elec	80	°C	UL 746B
Relative Temp Index, Mech w/impact	80	°C	UL 746B
Relative Temp Index, Mech w/o impact	80	°C	UL 746B
<b>ĐØÇÍ ×ÝßÔ</b>			
Mold Shrinkage on Tensile Bar, flow (2) (5)	0.5 - 0.7	%	SABIC Method
Density	1.05	g/cm³	ISO 1183
Water Absorption, (23°C/sat)	1	%	ISO 62
Moisture Absorption (23°C / 50% RH)	0.2	%	ISO 62
Melt Flow Rate, 220°C/10.0 kg	6	g/10 min	ISO 1133
Melt Volume Rate, MVR at 220°C/10.0 kg	6	cm³/10 min	ISO 1133
<b>ŪØŪŸÎ Î ×ÝßÔ</b>			
Volume Resistivity	>1.E+15	Ohm-cm	IEC 60093
Surface Resistivity, ROA	>1.E+15	Ohm	IEC 60093
Dielectric Strength, in oil, 0.8 mm	35	kV/mm	IEC 60243-1
Dielectric Strength, in oil, 1.6 mm	26	kV/mm	IEC 60243-1
Dielectric Strength, in oil, 3.2 mm	18	kV/mm	IEC 60243-1
Relative Permittivity, 50/60 Hz	2.8	-	IEC 60250
Relative Permittivity, 1 MHz	2.7	-	IEC 60250
Dissipation Factor, 50/60 Hz	0.011	-	IEC 60250

1) Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume rate are measured on injection moulded samples. All samples are prepared according to ISO 294.

2) Only typical data for material selection purpose. Not to be used for part or tool design.  
 3) This rating is not intended to reflect hazards presented this or any other material under actual fire conditions.  
 4) Own measurement according to UL.  
 5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Dongguan Yi-Ming Plastic Chemical Co., Ltd.

如需要更多物性资料请查阅 [www.kedisujiao.com](http://www.kedisujiao.com)

备注：以上原料物性数据由厂家发布，我公司仅提供参考！数据如有变动，请联系原料生产厂家获知。我公司不承担任何法律责任！

YŞ½±´¿½ö Î »--² Üí èè

Ü«®±°»óß°®½¿óÓ·¼¼´» Ü¿-~æ ÝÑÓÓÛÎ Ý×ßÔ

İ ÇĐ×ÝßÔ ĐÎ ÑĐÛÎ İ ×ÛÍ g	İ ÇĐ×ÝßÔ ÈßÔÈÜ	ÈÖ×İ	İ İ ßÖÛßÎ Ü
ÜÓÛÛİ İ ×ÝßÔ			
Dissipation Factor, 1 MHz	0.015	-	IEC 60250
Comparative Tracking Index	575	V	IEC 60112
ÜÓßÓÛ ÝØßÎ ßÝİ ÛÎ ×İ İ ×Ýİ			
UL Recognized, 94HB Flame Class Rating (3)	1.5	mm	UL 94
UL Recognized, 94HB Flame Class Rating 2nd value (3)	3	mm	UL 94
Glow Wire Flammability Index 650°C, passes at	3.2	mm	IEC 60695-2-12
Glow Wire Flammability Index 750°C, passes at	1	mm	IEC 60695-2-12
FMVSS Burning Speed, thickness 1 mm	25	mm/min	FMVSS 302

1) Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 230C/50% relative humidity.  
All properties, except the melt volume rate are measured on injection moulded samples.  
All samples are prepared according to ISO 294.

2) Only typical data for material selection purpose. Not to be used for part or tool design.  
3) This rating is not intended to reflect hazards presented this or any other material under actual fire conditions.  
4) Own measurement according to UL.  
5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Dongguan Yi-Ming Plastic Chemical Co., Ltd.

如需要更多物性资料请查阅 [www.kedisujiao.com](http://www.kedisujiao.com)

备注：以上原料物性数据由厂家发布, 我公司仅提供参考！数据如有变动，请联系原料生产厂家获知。我公司不承担任何法律责任！

YŞ½±´¿½ö Î »-·² Ûí èè

Û«®±° »óß°®½¿óÓ·¼¼´ » Û¿-æ ÝÑÓÓÛÎ Ý×ßÔ

ÐÎ ÑÝÛÍ Í ×ÐÛ ÐßÎ ßÓÛÎ ÛÎ Í	Ì ÇÐ×ÝßÔ ÈßÔÈÛ	ÈÖ×Ì
×²¶½±´¿½ö Î±´¼·²¹		
Drying Temperature	90 - 100	°C
Drying Time	2 - 4	hrs
Maximum Moisture Content	0.1	%
Melt Temperature	250 - 280	°C
Nozzle Temperature	245 - 275	°C
Front - Zone 3 Temperature	250 - 280	°C
Middle - Zone 2 Temperature	250 - 280	°C
Rear - Zone 1 Temperature	230 - 260	°C
Hopper Temperature	60 - 80	°C
Mold Temperature	40 - 80	°C

1) Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 230C/50% relative humidity. All properties, except the melt volume rate are measured on injection moulded samples. All samples are prepared according to ISO 294.

2) Only typical data for material selection purpose. Not to be used for part or tool design.  
 3) This rating is not intended to reflect hazards presented this or any other material under actual fire conditions.  
 4) Own measurement according to UL.  
 5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Dongguan Yi-Ming Plastic Chemical Co., Ltd.


如需要更多物性资料请查阅 [www.kedisujiao.com](http://www.kedisujiao.com)

备注：以上原料物性数据由厂家发布, 我公司仅提供参考！数据如有变动，请联系原料生产厂家获知。我公司不承担任何法律责任！

YŞ½±´¿½ö Î »-·² Ûí èè

Û«®±°»óB®½¿óÓ·¼¼´» Û¿-æ ÝŃÓÓÛÎ Ý×BÔ

**CALCULATED FLOW LENGTH INDICATION**  
**Moldflow® Radial Flow Analysis**  
**Cycolac® G365**  
**Melt Temperature : 260°C**  
**Mold Temperature : 60°C**

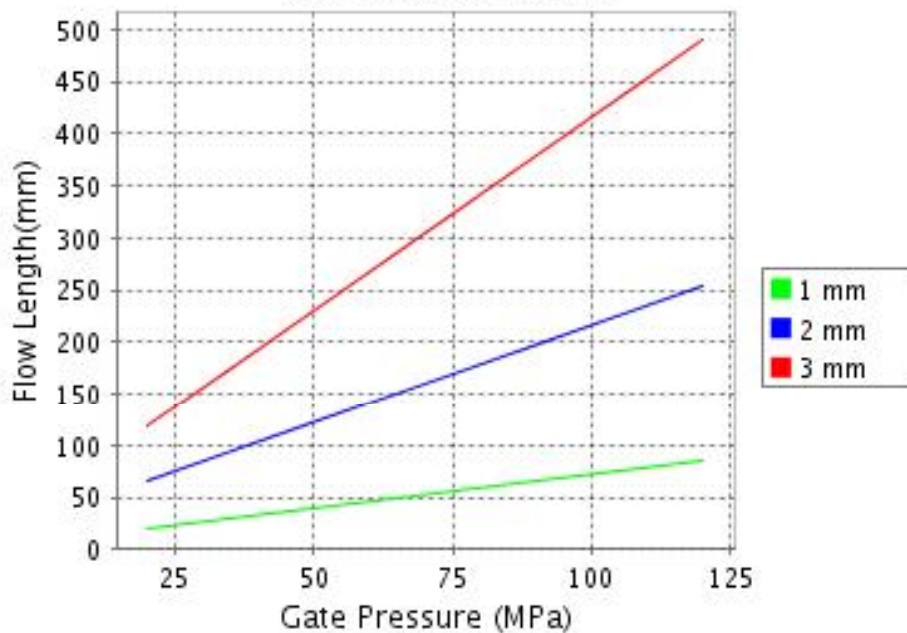

**Note: Technical support is recommended if Gate Pressure is greater than 80 MPa. Contact your local representative.**

® Moldflow is a registered trademark of the Moldflow Corporation.

1) Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 230C/50% relative humidity. All properties, except the melt volume rate are measured on injection moulded samples. All samples are prepared according to ISO 294.

2) Only typical data for material selection purpose. Not to be used for part or tool design.  
 3) This rating is not intended to reflect hazards presented this or any other material under actual fire conditions.  
 4) Own measurement according to UL.  
 5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Dongguan Yi-Ming Plastic Chemical Co., Ltd.

如需要更多物性资料请查阅 [www.kedisujiao.com](http://www.kedisujiao.com)

备注：以上原料物性数据由厂家发布, 我公司仅提供参考！数据如有变动，请联系原料生产厂家获知。我公司不承担任何法律责任！